

工 事 名 : 6災 6127号 市道日砂子線 道路災害復旧工事					数 量 調 書(1 / 1)	
工事場所 : 輪島市 門前町浦上地内						
工 種	規 格	寸 法	単位	数 量	計 算 式	摘 要
土 工						
	掘 削		m3	50	49.08 = 49.08 m3	
	残 土 処 分		m3	50	49.08 = 49.08 m3	
舗 装 工						
	表 層 工	密粒度As (20F) t =5cm	m2	512	512.48 = 512.48 m ²	
	不陸整正	粒調碎石 (M-30) t =3cm	m2	22	21.72 = 21.72 m ²	
	上層路盤工	粒調碎石 (M-30) t =10cm	m2	491	490.76 = 490.76 m ²	
排水構造物工						
	補修工		式	1	1.00 = 1.00 式	2箇所
取 壊 工						
	舗装切断工		m	23	23.10 = 23.10 m	
	アスファルト舗装版 破 碎 工		m2	510	512.48 = 512.48 m2	
	アスファルト殻運搬		m3	26	V= 0.05 x 512.48 = 25.62 m3	
	アスファルト殻 処 分 費		t	60	W= 25.62 x 2.35 = 60.22 t	
						輪 島 市

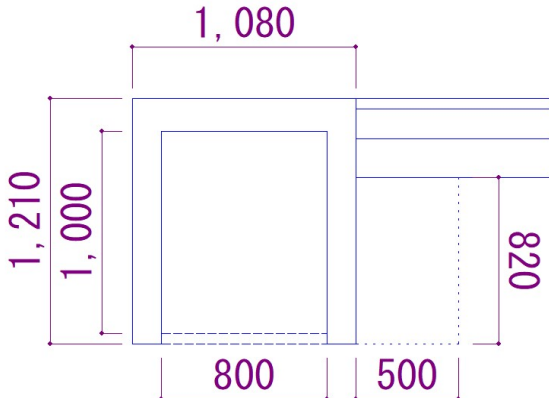
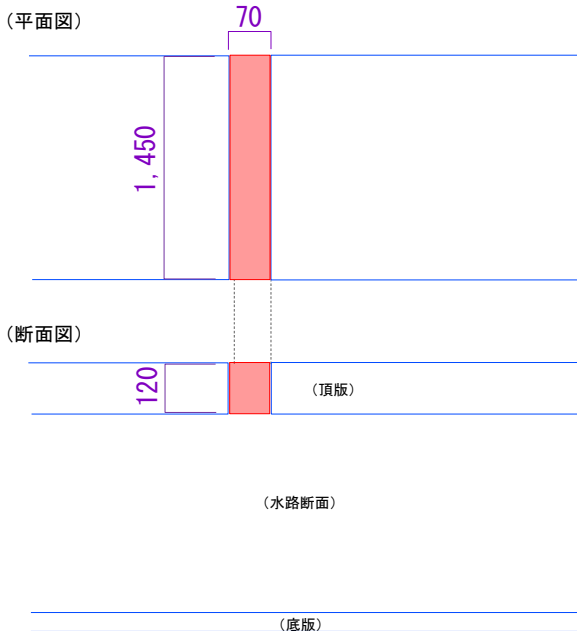
工 事 名 : 6災 6127号 市道日砂子線 道路災害復旧工事
 工事場所 : 輪島市 門前町浦上地内

(1/1)

土 量 計 算 書

測 点	単距離						上層路盤		上層路盤	下層路盤	下層路盤	下層路盤	下層路盤	区画線	区画線	舗装版切断	摘 要
		幅 員	平 均	掘削深	掘削土量	路床盛土	舗装面積	不陸整正	t=10cm	t=15cm	t=10cm	t=15cm	t=19cm	白 15cm	白 45cm		
No. 0	—	4. 2	—		—										—	4. 20	A-①
No. 1	1. 0	4. 0	4. 10	0. 00	0. 00		4. 10	4. 10									
No. 6. 0	5. 0	2. 2	3. 10	0. 10	1. 55		15. 50		15. 50								
No. 15. 2	9. 2	2. 6	2. 40	0. 10	2. 21		22. 08		22. 08								
No. 15. 4	0. 2	2. 6	2. 60	0. 00	0. 00		0. 52	0. 52									
No. 16. 2	0. 8	2. 6	2. 60	0. 00	0. 00		2. 08	2. 08								2. 60	
No. 48. 0	—	2. 0	—		—											2. 00	A-②
No. 49. 0	1. 0	2. 0	2. 00	0. 00	0. 00		2. 00	2. 00									
No. 56. 2	7. 2	2. 0	2. 00	0. 10	1. 44		14. 40		14. 40								
No. 56. 2	0. 0	3. 0	2. 50	0. 10	0. 00		0. 00		0. 00								
No. 58. 9	2. 7	3. 0	3. 00	0. 10	0. 81		8. 10		8. 10								
No. 58. 9	0. 0	3. 2	3. 10	0. 10	0. 00		0. 00		0. 00								
No. 81. 5	22. 6	3. 2	3. 20	0. 10	7. 23		72. 32		72. 32								
No. 83. 5	2. 0	4. 5	3. 85	0. 10	0. 77		7. 70		7. 70								
No. 87. 9	4. 4	4. 2	4. 35	0. 10	1. 91		19. 14		19. 14								
No. 92. 3	4. 4	2. 8	3. 50	0. 10	1. 54		15. 40		15. 40								
No. 95. 0	2. 7	2. 8	2. 80	0. 10	0. 76		7. 56		7. 56								
No. 96. 0	1. 0	2. 8	2. 80	0. 00	0. 00		2. 80	2. 80								2. 80	
No. 123. 5	—	4. 5	—		—											4. 50	A-③
No. 124. 5	1. 0	5. 0	4. 75	0. 00	0. 00		4. 75	4. 75									
No. 129. 0	4. 5	5. 5	5. 25	0. 10	2. 36		23. 63		23. 63								
No. 131. 7	2. 7	4. 7	5. 10	0. 10	1. 38		13. 77		13. 77								
No. 135. 4	3. 7	3. 4	4. 05	0. 10	1. 50		14. 99		14. 99								
No. 135. 4	0. 0	3. 1	3. 25	0. 10	0. 00		0. 00		0. 00								
No. 162. 8	27. 4	2. 8	3. 10	0. 10	8. 49		84. 94		84. 94								
No. 176. 2	13. 4	4. 0	3. 40	0. 10	4. 56		45. 56		45. 56								
No. 191. 0	14. 8	3. 0	3. 50	0. 10	5. 18		51. 80		51. 80								
No. 193. 1	2. 1	3. 0	3. 00	0. 10	0. 63		6. 30		6. 30								
No. 194. 1	1. 0	3. 0	3. 00	0. 00	0. 00		3. 00	3. 00								3. 00	
No. 0	—	4. 4			—												B
No. 3. 3	3. 3	2. 2	3. 30	0. 10	1. 09		10. 89		10. 89								
No. 9. 9	6. 6	2. 6	2. 40	0. 10	1. 58		15. 84		15. 84								
No. 9. 9	0. 0	2. 1	2. 35	0. 10	0. 00		0. 00		0. 00								
No. 19. 1	9. 2	2. 0	2. 30	0. 10	2. 12		21. 16		21. 16								
No. 24. 7	5. 6	3. 2	2. 60	0. 10	1. 46		14. 56		14. 56								
No. 26. 6	1. 9	2. 2	2. 70	0. 10	0. 51		5. 13		5. 13								
No. 27. 3	0. 7	2. 2	2. 20	0. 00	0. 00		1. 54	1. 54									
No. 27. 6	0. 3	4. 0	3. 10	0. 00	0. 00		0. 93	0. 93								4. 00	
合 計	162. 4	3. 2			49. 08	0. 00	512. 48	21. 72	490. 76	0. 00	0. 00	0. 00	0. 00	0. 00	0. 00	23. 10	

上層路盤工 計 490.76 m2
 下層路盤工 計 0.00 m2

工種	排水構造物工	単位数量計算書		1式当り
規格	補修工			
略 図				
自由勾配側溝 (W800×H1000)		頂版		
				
間隔L=5cm		間隔L=7cm		
モルタル	自由勾配側溝	1.08 × 1.21 - 0.80 × 1.00 = 0.507		
		0.507 × 0.05 = 0.025		
	頂版	1.45 × 0.07 × 0.12 = 0.012		
		計 0.037	0.04 m3	
		1.00 × 0.05 × 2 +		
型枠	自由勾配側溝	0.8 × 0.05 = 0.14		
	頂版	1.45 × 0.07 = 0.10		
		計 0.24	0.2 m2	